


PANEL TO CONNECTING POST INSTALLATION MODELS:

CAUTION:
OFFICE FURNITURE IS HEAVY. ENSURE THAT YOU HAVE ADEQUATE ASSISTANCE WHEN LIFTING AND MOVING PARTS AND ASSEMBLIES. KEEP HARDWARE OUT OF REACH OF CHILDREN

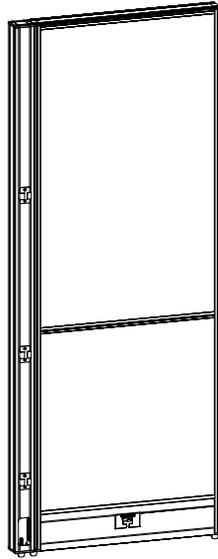

PANELS:


FRM-2466P	} Requires securing screw connection (see Step 2)
FRM-3066P	
FRM-3666P	
FRM-4266P	
FRM-4866P	
FRM-6066P	} Requires securing screw connection (see Step 2)
FRM-6666P	
FRM-7266P	
FRM-2448P	
FRM-3048P	
FRM-3648P	} Requires securing screw connection (see Step 2)
FRM-4248P	
FRM-4848P	
FRM-2466GP	
FRM-3066GP	
FRM-3666GP	

POSTS:

FRM-66SQP-4W
FRM-48SQP-4W
FRM-66SQP-3W
FRM-48SQP-3W
FRM-66SQP-2W
FRM-48SQP-2W
FRM-66TRP-3W
FRM-48TRP-3W
FRM-48TRP-2W
FRM-66SQP-2S
FRM-48SQP-2S
FRM-66SQP-1W
FRM-48SQP-1W
FRM-48REC-1W
FRM-66REC-1W
FRM-48REC-2S
FRM-66REC-2S

1. To attach a panel to a connecting post, lift the panel and place it flush to the connecting post then slide down to engage the clips.

CLIP ATTACHMENT
Male clip (top) attaches to female clip (bottom) as shown here.

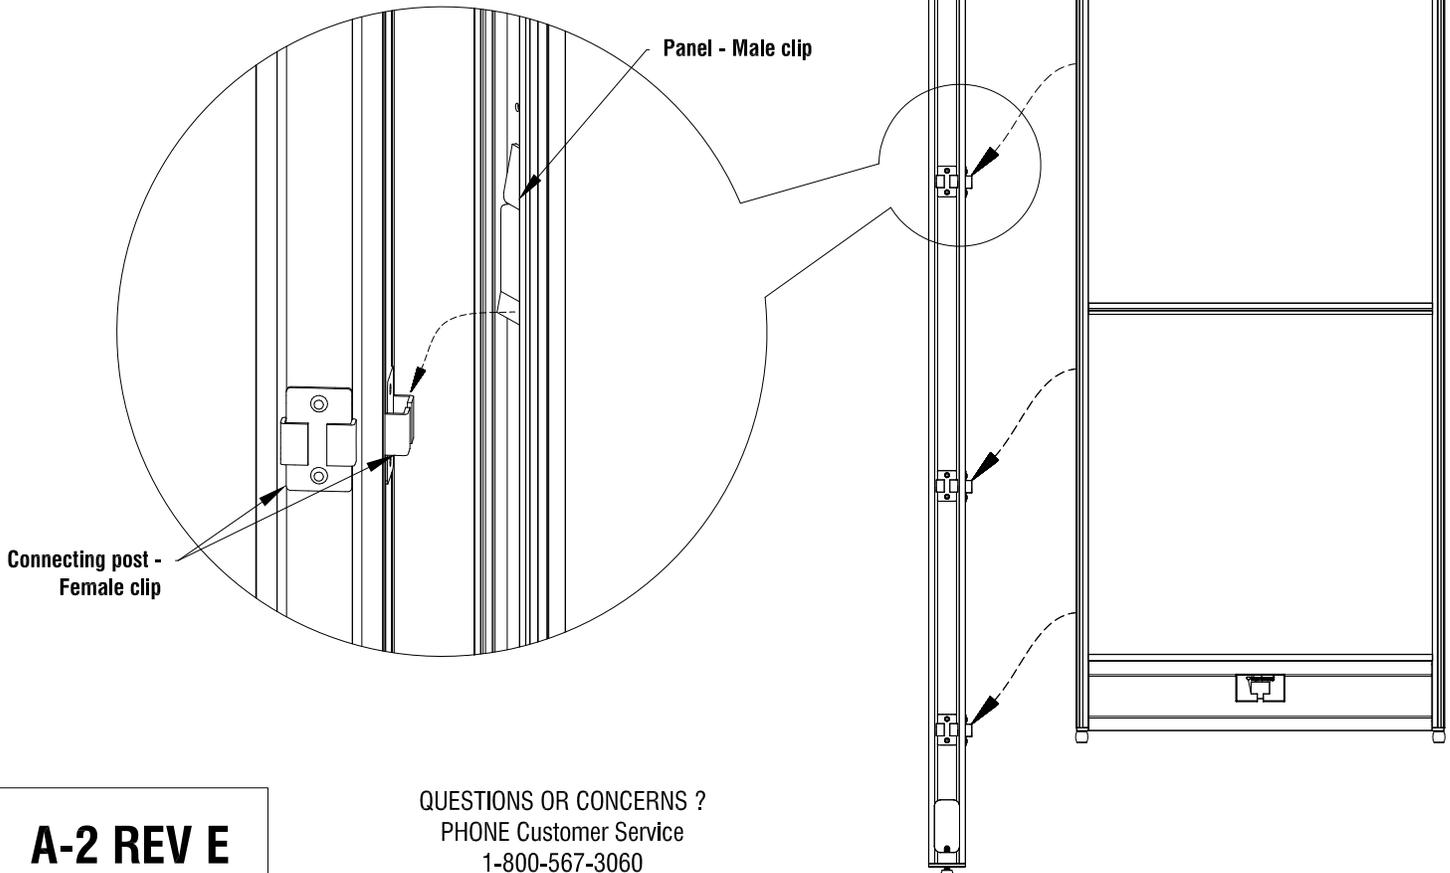


A-2 REV E


December 3, 2015

QUESTIONS OR CONCERNS ?
PHONE Customer Service
1-800-567-3060
1-250-765-4145
M-F 7am - 4:30 pm PST



66" Tall Panel To 66" Tall Panel

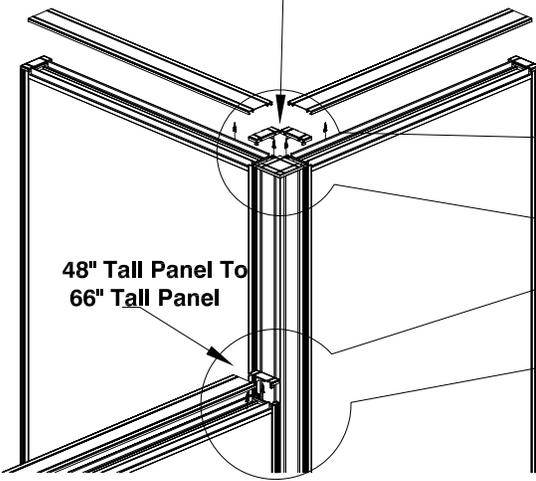



48" Tall Panel To 66" Tall Panel

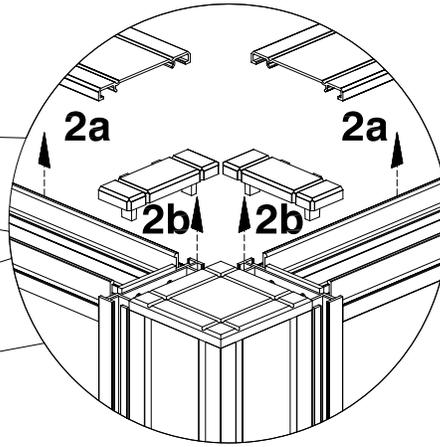

2a. Remove Top Covers.
2b. Remove Side Pillar Caps.

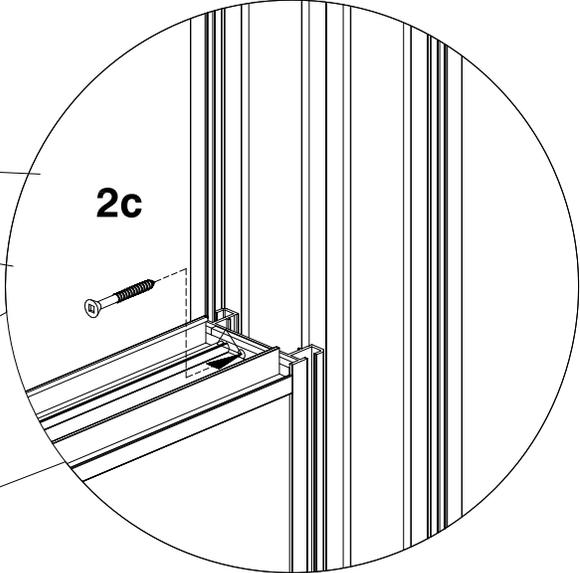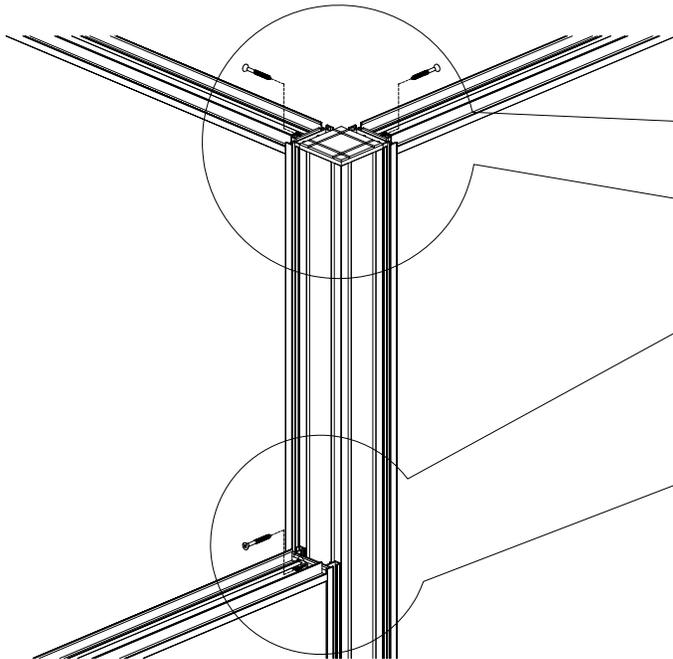

2c. Install Securing Screw(s).

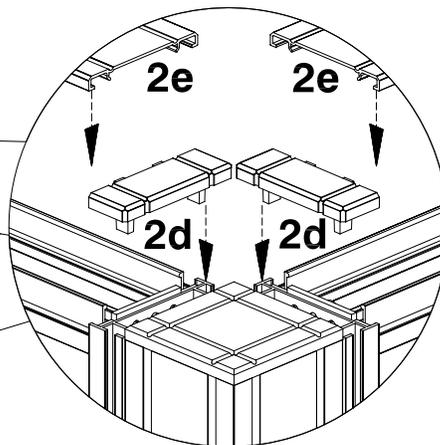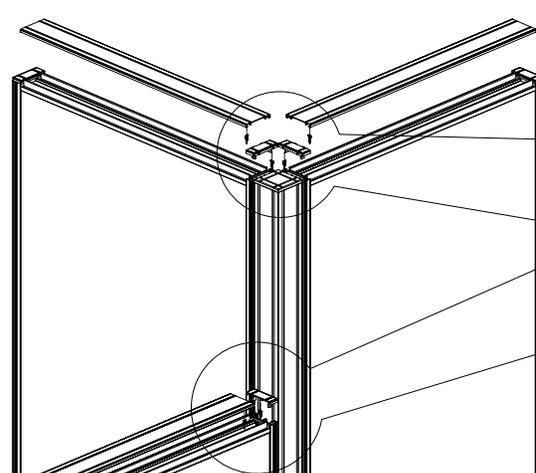

2d. Re-Install Side Pillar Caps.
2e. Re-Install Top Covers.

Each Post is supplied with 4 screws. These are only required to attach 24", 30" and 36" Panels to Posts. Therefore you may not necessarily use all screws supplied.

A-2 REV E

December 3, 2015

QUESTIONS OR CONCERNS ?

PHONE Customer Service

1-800-567-3060

1-250-765-4145

M-F 7am - 4:30 pm PST